







REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/24/05'		

Positions	A	B
24	45.3	40.9
28	50.4	46.0
32	55.5	51.1
40	65.6	61.2
48	75.8	71.4

1. FEATURES
- 1.1. Compact mechanical construction to ensure long term life.
 - 1.2. Zero insertion and extraction pressure.
 - 1.3. standard 0.100(2.54mm) IC pitch,easy to mount in PC board.
 - 1.4. All plastics are UL 94v-0 grade fire retardant.
 - 1.5. Gold plated contact to ensure low contact resistance and long operation life.

2. SPECIFICATION
- 2.1. ELECTRICAL:
- 2.1.1. Rating:50VDC,100mA.
 - 2.1.2. Contact Resistance: 50mΩ Max.
 - 2.1.3. Insulation Resistance:1000MΩ Min.
 - 2.1.4. Dielectric withstanding volatage:500VDC min. for 60 seconds.Capacitance between adjacent contacts.
- 2.2. MECHANICAL AND ENVIRONMENTAL
- 2.2.1. Temperature Rating:
 - 2.2.2. Operating: -25°C to +70°C
 - 2.2.3. Storage: -40°C to +85°C
 - 2.2.4. Durability:25,000 cycles(with load)
 - 2.2.5. Humidity:95%RH,40°C for 48 Hrs.
 - 2.2.6. Solderability:After flux 230°C for 5±0.5 Seconds,95% coverage
 - 2.2.7. Soldering Heat:260±5°C for 5±1 Seconds.

3. PRODUCT NUMBER CODE:

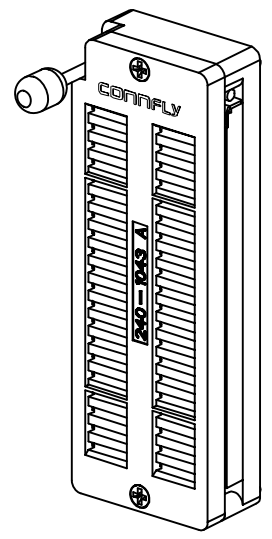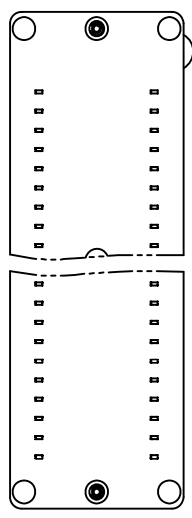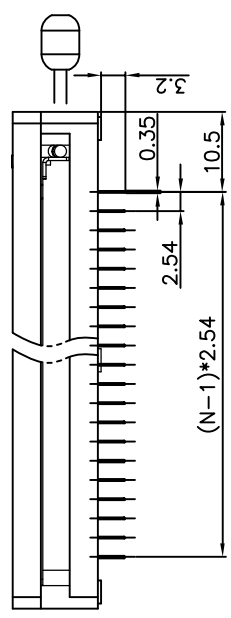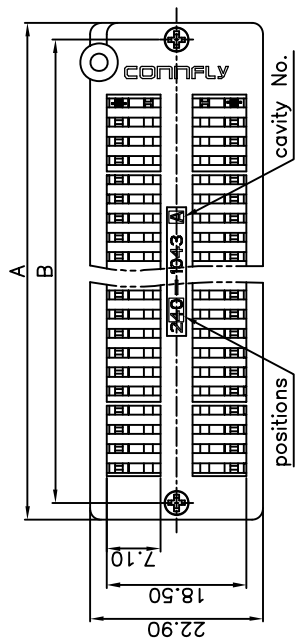

GENERAL TOLERANCE	ANGLE	TOLERANCE	
X.	±0.60	X.	±5°
X.	±0.38	X.	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET 1 OF 1	
DRAWING NO.	C-DS1043-XXX		

PROJECTION	TITLE	ZIF SOCKET
UNITS	mm	
SHEET SIZE	A4	SERIES DS1043 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD







REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DMJ 06/07/07'	~	LJC 06/07/07'
B	修改表格尺寸	YCH 09/17/07'	~	

Positions	A	B	C	D	E
14	32.6	28.2	15.24	7.62	14.9
16	35.1	30.7	17.78	7.62	14.9
20	40.2	35.8	22.86	7.62	14.9
24	45.3	40.9	27.94	7.62	14.9
28	50.4	46.0	33.02	7.62	14.9
32	55.5	51.1	38.10	15.24	22.9
40	65.6	61.2	48.26	15.24	22.9
48	75.8	71.4	58.42	15.24	22.9

1. FEATURES
- 1.1. Compact mechanical construction to ensure long term life.
 - 1.2. Zero insertion and extraction pressure.
 - 1.3. standard 0.100(2.54mm) IC pitch,easy to mount in PC board.
 - 1.4. All plastics are UL 94v-0 grade fire retardant.
 - 1.5. Gold plated contact to ensure low contact resistance and long operation life.

2. SPECIFICATION
- 2.1. ELECTRICAL:
- 2.1.1. Rating:50VDC,100mA.
 - 2.1.2. Contact Resistance: 50mΩ Max.
 - 2.1.3. Insulation Resistance:1000MΩ Min.
 - 2.1.4. Dielectric withstanding volatage:500VDC min. for 60 seconds.Capacitance between adjacent contacts.
- 2.2. MECHANICAL AND ENVIRONMENTAL
- 2.2.1. Temperature Rating:
 - 2.2.2. Operating: -25℃ to +70℃
 - 2.2.3. Storage: -40℃ to +85℃
 - 2.2.4. Durability:25,000 cycles(with load)
 - 2.2.5. Humidity:95%RH,40℃ for 48 Hrs.
 - 2.2.6. Solderability:After flux 230℃ for 5±0.5 Seconds,95% coverage
 - 2.2.7. Soldering Heat:260±5℃ for 5±1 Seconds.

3. PRODUCT NUMBER CODE:

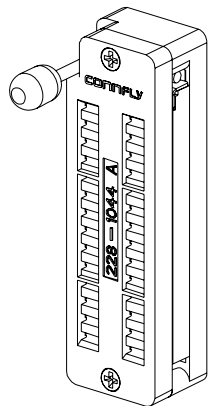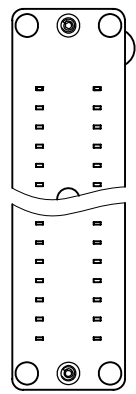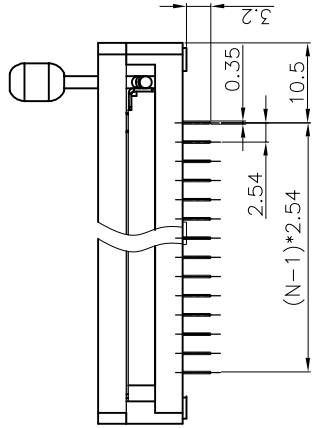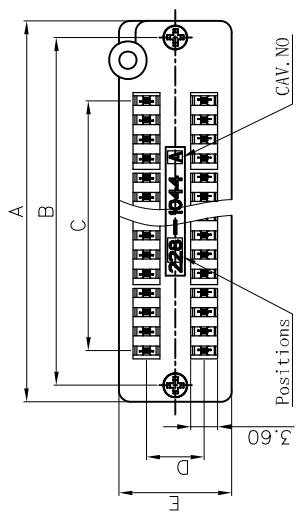

GENERAL TOLERANCE	ANGLE	TOLERANCE
X.	±0.60	X.
X.	±0.38	X.
.XX	±0.25	.XX
DRAWING TYPE CUSTOMER		
SCALE	1:1	SHEET 1 OF 1
DRAWING NO.	C-DS1044-XXX	

PROJECTION		TITLE
UNITS	mm	ZIF SOCKET
SHEET SIZE	A4	SERIES DS1044 SERIES

晨翔电子有限公司
CONNPLY ELECTRONIC CO. LTD